

MCH

MCH RealSubns® 高重频



Q

300ps

100kHz

TEM₀₀

学参数					
(nm)	1064		532		
(kHz)	20	100	20	100	
(mW)	60	100	30	50	
(J)	3	1	1.5	0.5	
(ps)	350	500	300	500	
(8h)	±3%				
TEM ₀₀					
Typ.(mrad)	@ 1/e ²	25	30	16	25
	@ 1/e ²	25	30	16	25
>100:1					
系统参					
100-240 VAC, 50/60 Hz					
RS232 USB					
(W)	35	40	35	40	
(W×H×L,mm)	168×88×140				
(W×H×L,mm)	45×33×120				
()	15-35				
()	0-60				

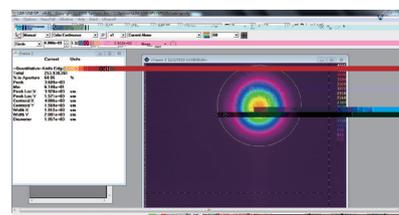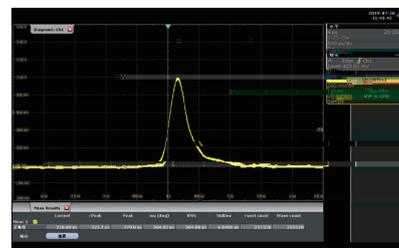

1. 355nm 266nm

2.

波长	型号	重复频率	单脉冲能量

