

# 08BULT

08BULT

AW

PD

封装形式		08BULT	
中心波长 (nm)		808	980
光学	$P_{op}$ W	2	3
	nm	±10	
	FWHM $\lambda$ nm	<6	
	$\lambda/T$ nm/	0.3	
	$P_a$ mW	2	
	$\lambda_a$ nm	650±10	
	$V_a$ V	2.2	
电学	$I_{th}$ A	0.4	0.6
	$I_{op}$ A	2.4	4
	$V_{op}$ V	2.1	2.2
	$\eta_{es}$ W/A	1	0.9
	$R_t$ k $\Omega/\beta$ 25	10±5%/3450	
光纤	$D_{core}$ $\mu$ m	200	
	$D_{clad}$ $\mu$ m	220	
	$D_{buffer}$ $\mu$ m	400	
	NA	0.22	
		SMA905	

参数	工作温度 (°C)	工作相对湿度	储温度 (°C)	存储相对湿度 (%)	引脚焊接温度 (max/°C)
最小	10	-	-20	-	-
最大	30	75	70	90	250(10Sec.)


---




---

\* D -  
 \* P -  
 FS -


---

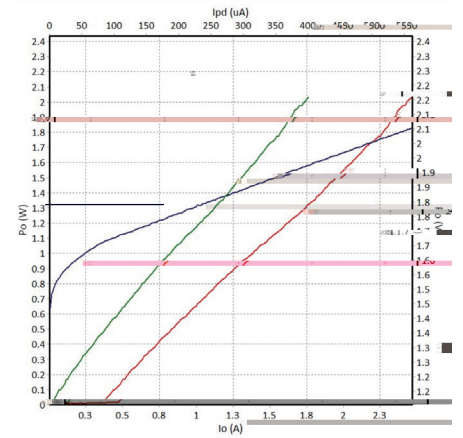

808nm P-I-V

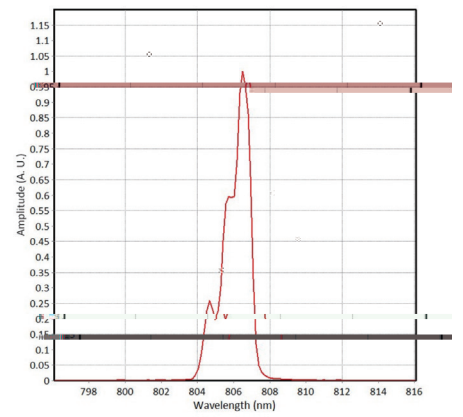

808nm

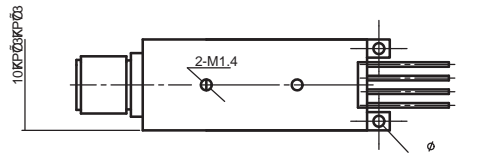


---



---



---

08BULT

