


# MCD

# 350ps-2ns

# OEM

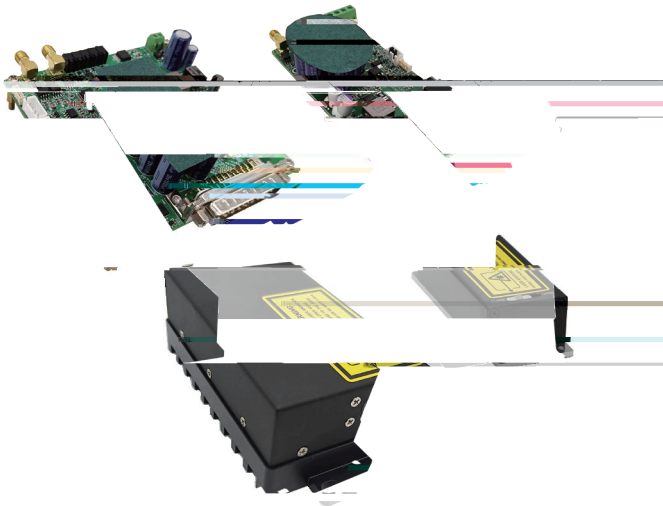

MCD RealSubns®

Q

OEM

1-2mJ

350ps

300μJ


偏振方向稳定性高

TEM<sub>00</sub>


结构紧凑，高可靠性

双脉宽输出可选


红光指示可选

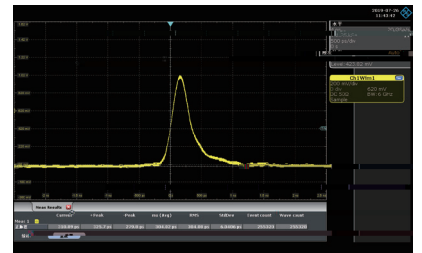


300ps

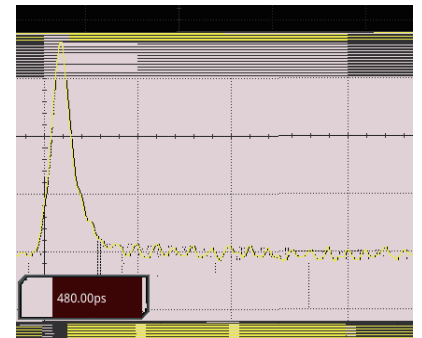

500ps

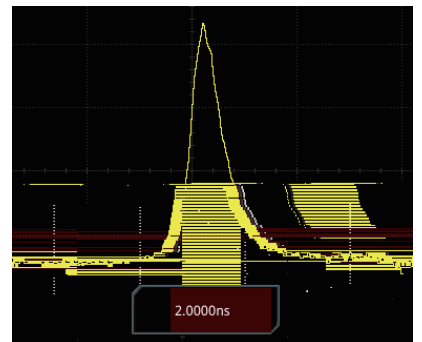

2ns

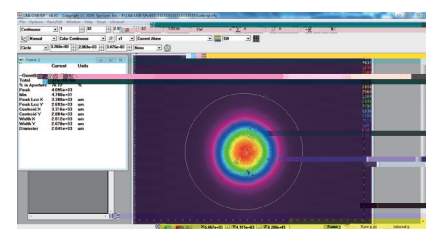

光学参数			
(nm)	1064		
(kHz)	0.01		
(mW)	3	3	3/3
( J)	300	300	300/300
(ps)	500	350	500/2000
(8h)	±3%		
TEM <sub>00</sub>			
Typ.(mrad)	@1/e <sup>2</sup>	6	6-4
	@1/e <sup>2</sup>	6	6-4
	P	>100:1	500ps-P >100:1 2ns-S >100:1
系统参数			
	12V 2A		
	SMA		
(W)	10		
(W×H×L,mm)	68×35×120	100×23×100	
(W×H×L,mm)	45×30×120	145×70×46	
( )	15~35		
( )	0~60		

波长	型号	重复频率	单
----	----	------	---

--	--	--	--

--	--	--	--

